



Ek-Balam Report #01

1. Cover sheet
2. Table of contents
3. Executive Summary
4. Ek-Balam Fields: JSO & BKS Reservoir Development Map
5. Previous Status (2021): Ek-Balam Field Infrastructure Layout
6. Status on March 2026: Evolution of the Ek-Balam Field infrastructure
7. Future Status (July 2026): Evolution of the Ek-Balam Field infrastructure
8. Official Crude Oil Production Management Plan
9. Alternative Crude Oil Production Management Plan (Unofficial)
10. Ek-A Offshore Facilities Configuration (Ek-A & Ek-A2)
11. Akal-B Offshore Complex: Integrated Production, Drilling and Compression Facilities

Wells: Spatial Distribution, Coordinates and Drilling Information for platforms:

12. Balam-Ek
13. Ek-A
14. Balam TB
15. Balam A
16. Ek-A2
17. Ek-TA
18. BALAM-TE
19. BALAM-TA
20. BALAM-TA2
21. EK-TB
22. BALAM-TD

The Ek–Balam field is a mature offshore development focused on the exploitation of Upper Jurassic Oxfordian (JSO) and Upper Cretaceous Breccia (BKS) reservoirs. Since the start of production in 1991, the asset has evolved into an integrated offshore network combining drilling, production, compression, and transportation infrastructure.

As of March 2026, the field consists of **11 offshore platforms, 10 pipelines, and 40 active wells**, with the Akal-B complex serving as the main processing and compression hub, supporting key satellite platforms in the Ek and Balam clusters (e.g., Ek-A, Ek-A2, Balam-A, Balam-TB).


Infrastructure Evolution

Between 2021 and 2026, the field has undergone incremental expansion, including new platforms and pipeline reconfigurations, transitioning toward a more integrated and flexible network that enhances flow assurance and operational reliability.


Future Developments (July 2026)

Planned activities include the installation of an **8" Ø gas pipeline (8 km)** from Akal-B to Ek-A, conversion of existing infrastructure (e.g., pipeline 121) to optimize multiphase transport, and the decommissioning of aging pipelines reaching the end of their service life.


The Ek and Balam fields are focused on the development of the Upper Jurassic Oxfordian (JSO) reservoirs and continue with the exploitation of the Upper Cretaceous Breccia (BKS) reservoirs. Hydrocarbon exploitation began in October 1991, and by the end of 1995, the BEC artificial pumping system was implemented.


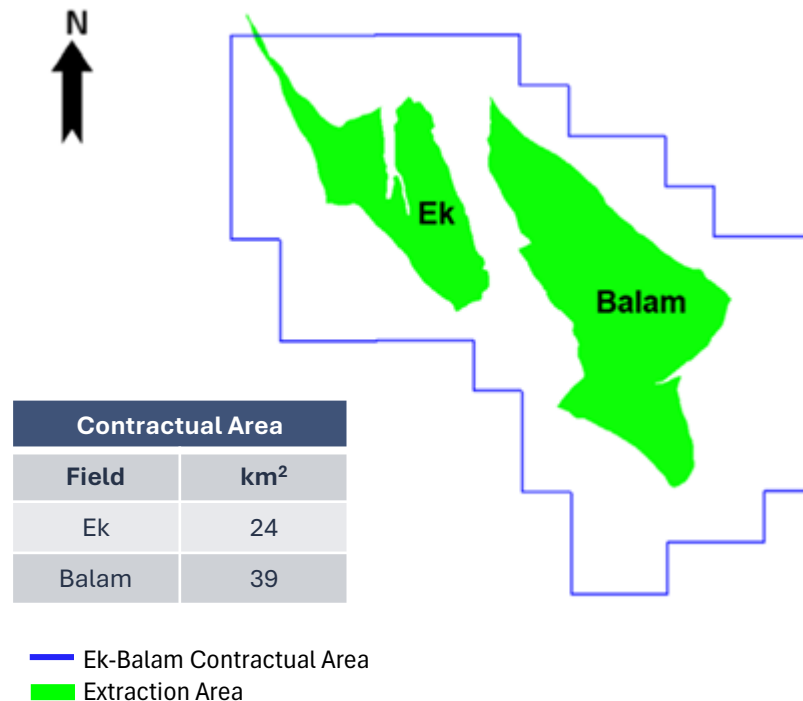


Previous Status (2021): Ek-Balam Field infrastructure Lay-out

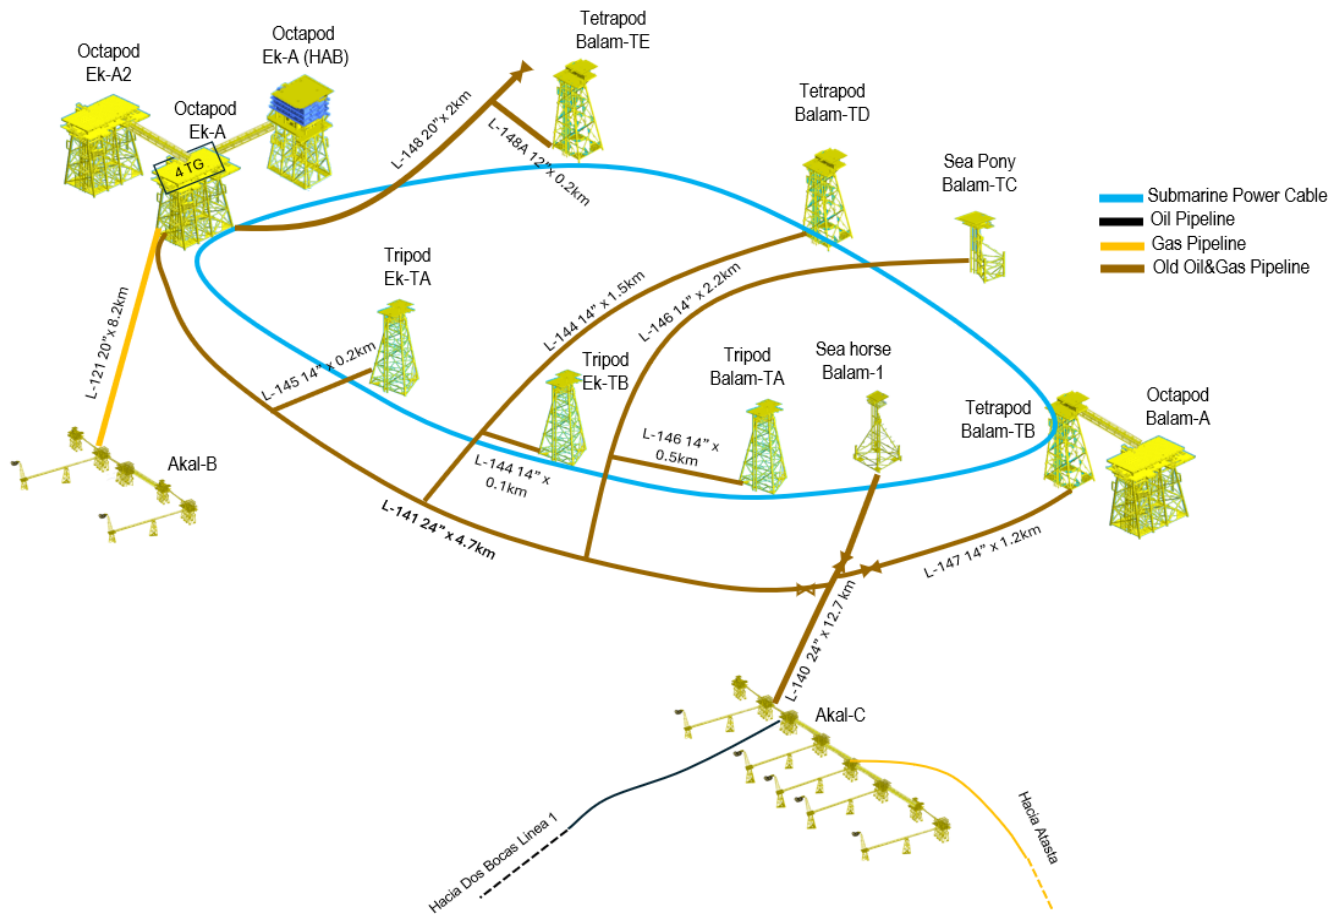



Status on March 2026: Addition of platforms and pipelines. The Ek-Balam area consists of 11 platforms, 10 pipelines, and 40 wells arranged as follows:

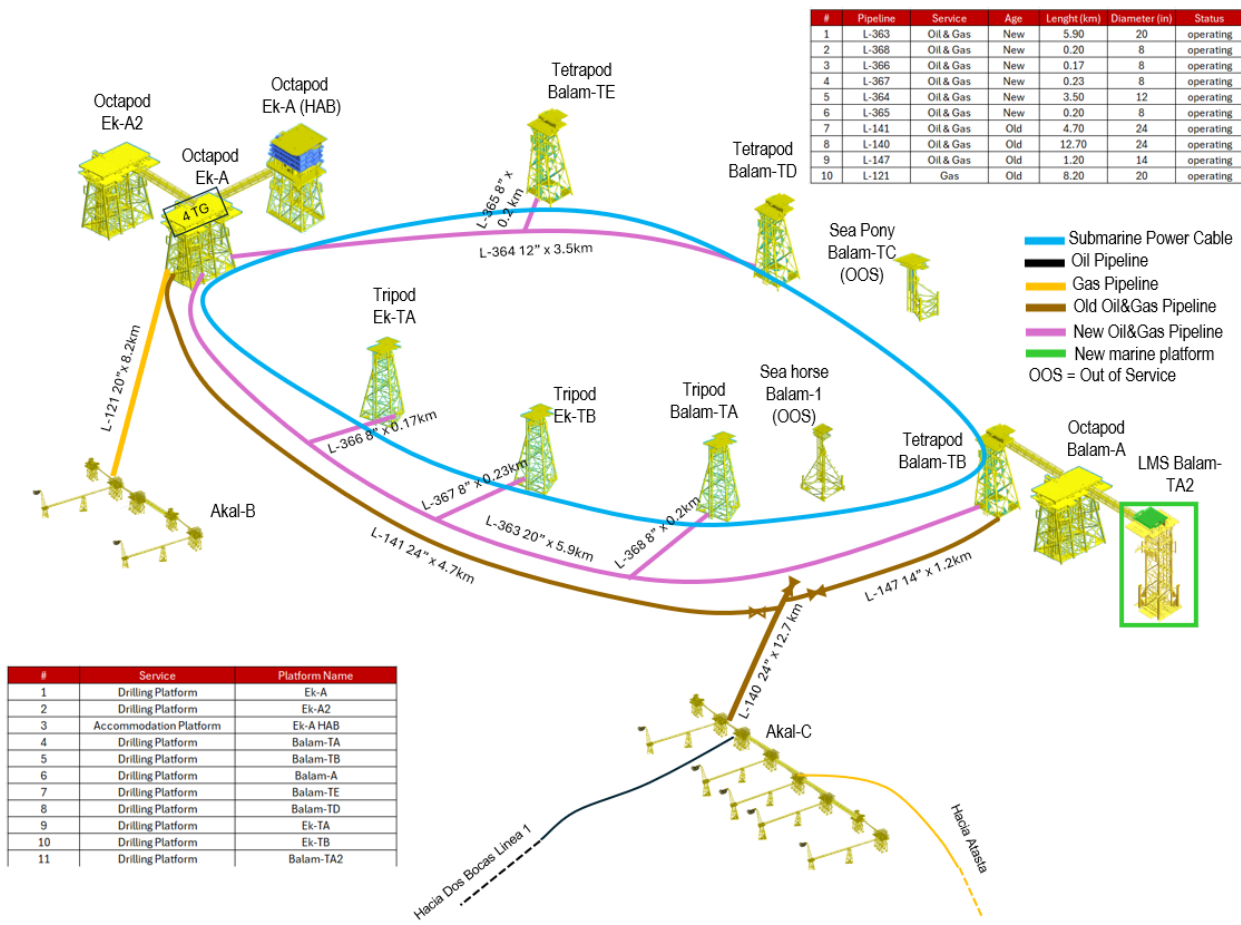

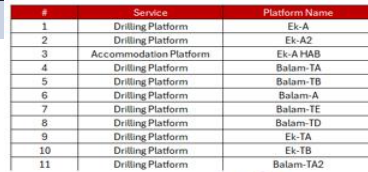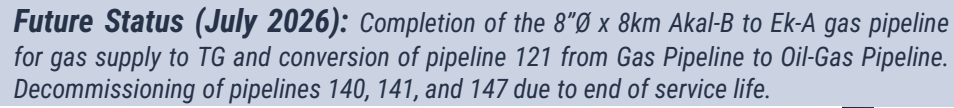


#	Pipeline	Service	Age	Length (km)	Diameter (in)	Status
1	L-363	Oil & Gas	New	5.90	20	operating
2	L-368	Oil & Gas	New	0.20	8	operating
3	L-366	Oil & Gas	New	0.17	8	operating
4	L-367	Oil & Gas	New	0.23	8	operating
5	L-364	Oil & Gas	New	0.55	12	operating
6	L-385	Oil & Gas	New	0.20	8	operating
7	L-141	Oil & Gas	Old	4.70	24	operating
8	L-140	Oil & Gas	Old	12.70	24	operating
9	L-147	Oil & Gas	Old	1.20	14	operating
10	L-121	Oil & Gas	Old	8.20	20	operating

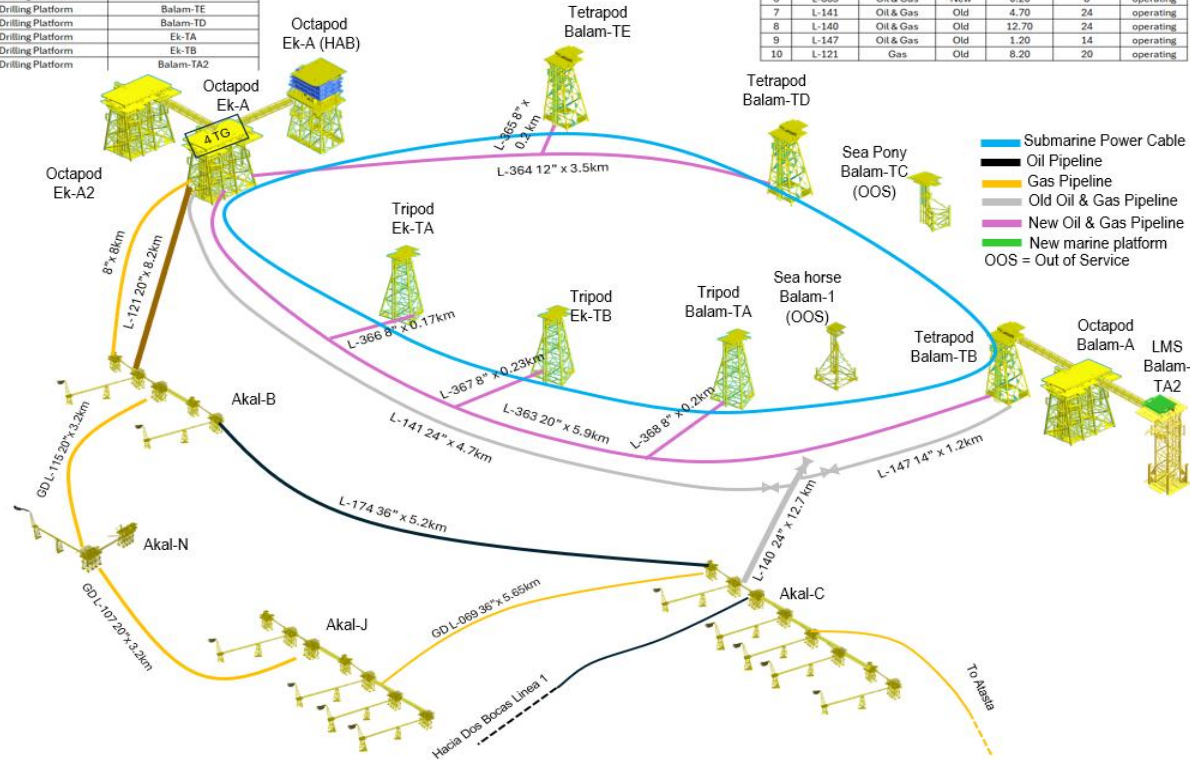

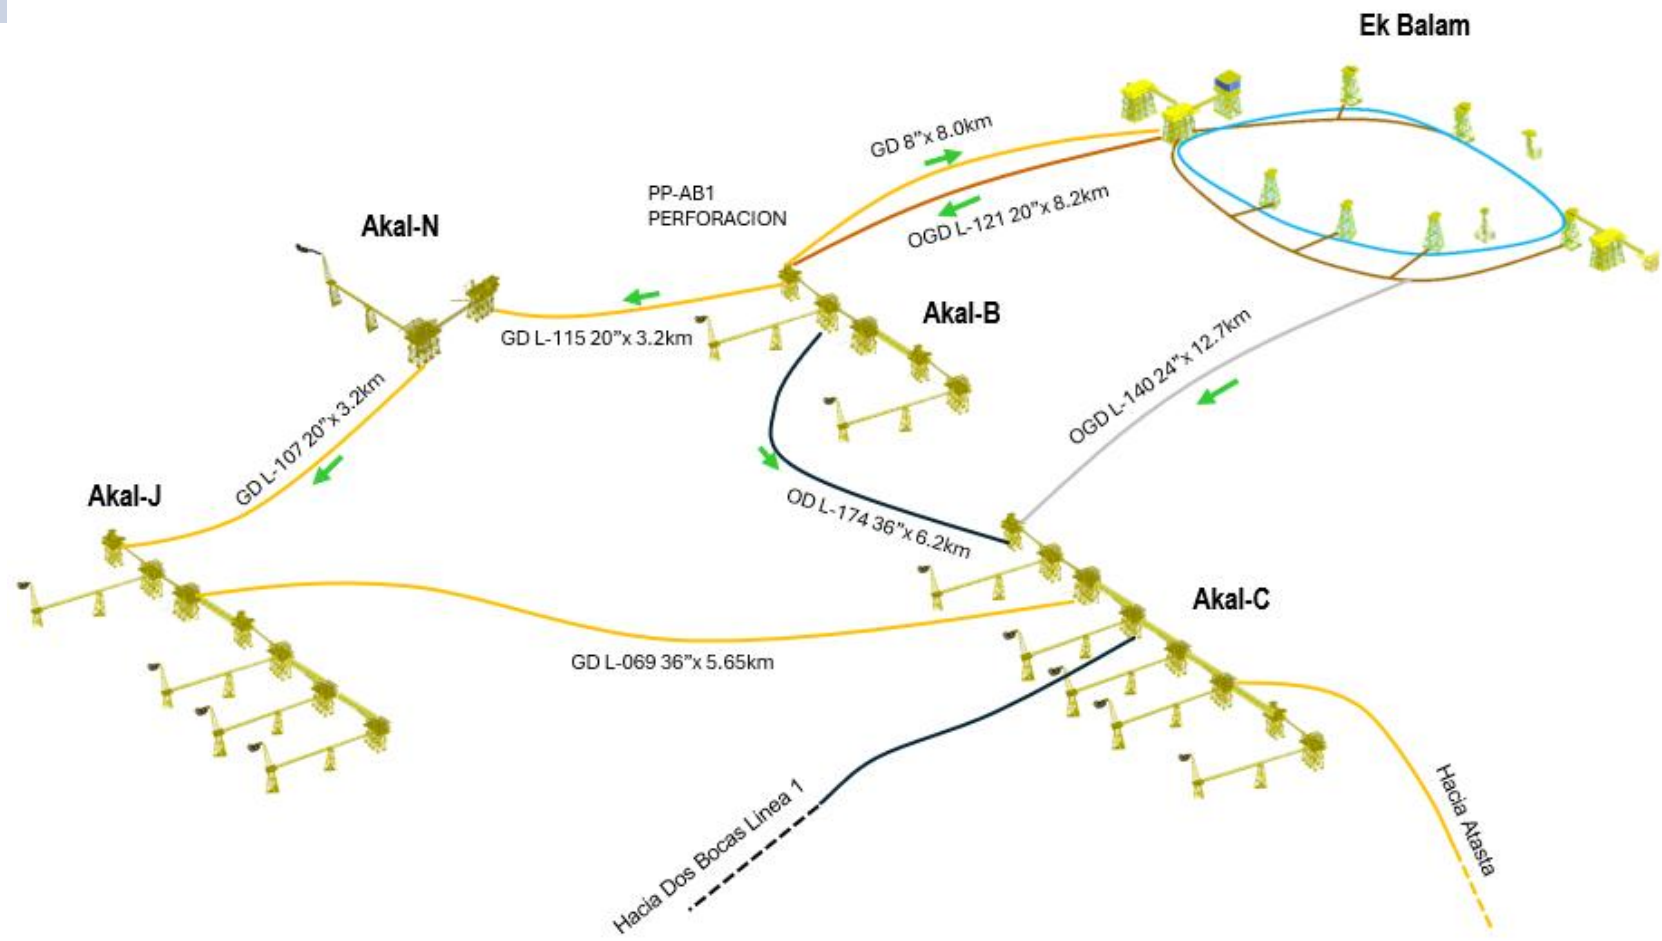

Alternative Crude Oil Production Management Plan (Unofficial)

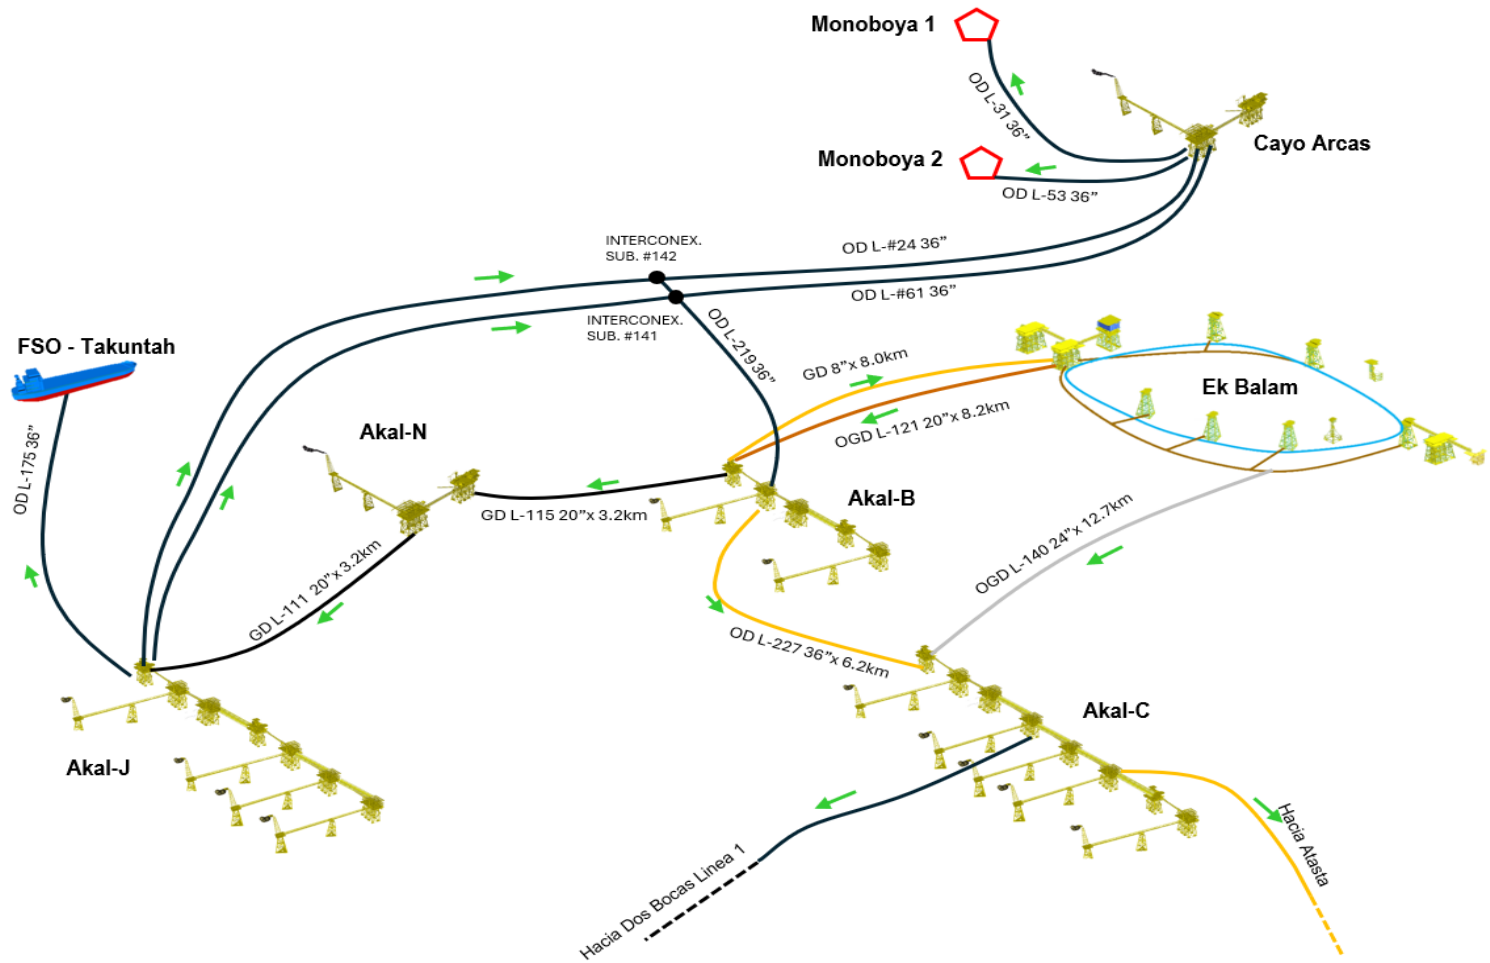

Ek-A Offshore Facilities Configuration (Ek-A & Ek-A2)




Akal-B Offshore Complex: Integrated Production, Drilling and Compression Facilities



Balam–Ek Offshore Platforms: Technical and Operational Summary




No.	Offshore Platform	Installation Date	Type	Service	Water Depth (m)	Number of wells	Wells
1	Balam-TA	2021	Tripod	Drilling	48	2	Balam-2, Balam-22
2	Balam-TB	2017	Tetrapod	Drilling	47.9	4	Balam-47, Balam-63, Balam-67, Balam-83
3	Balam-TD	2005	Tetrapod	Drilling	50.3	1	Balam-3
4	Balam-TE	2020	Tetrapod	Drilling	51.2	5	Balam-71, Balam-75, Balam-91, Ek-35H, Ek-55
5	Balam-A	2014	Octapod	Drilling	47.9	6	Balam-32, Balam-41, Balam-42, Balam-61, Balam-85, Balam-93
6	Balam-TA2	2022	Tetrapod (Lightweight Marine Structure)	Drilling	47.9	2	Balam-5, Balam-87
7	Ek-A	2018	Octapod	Drilling	51	6	Ek-11, Ek-27, Ek-31, Ek-33, Ek-56, Ek-101
8	Ek-A2	2018	Octapod	Drilling	51	7	Ek-14, Ek-29, Ek-32, Ek-47, Ek-53, Ek-57, Ek-69
9	Ek-TA	1996	Tripod	Drilling	49.9	5	Ek-9, Ek-17, Ek-21, Ek-25, Ek-37
10	Ek-TB	1996	Tripod	Drilling	49.1	2	Ek-41, Ek-63
11	Ek-A Habitacional	2018	Octapod	Accommodation	51	0	N/A
12	Sea Horse Balam-1	1992	Sea Horse	Out of Service	48	-	
13	Sea Pony Balam-TC	1993	Sea Pony	Out of Service	50	-	

Total wells: 40

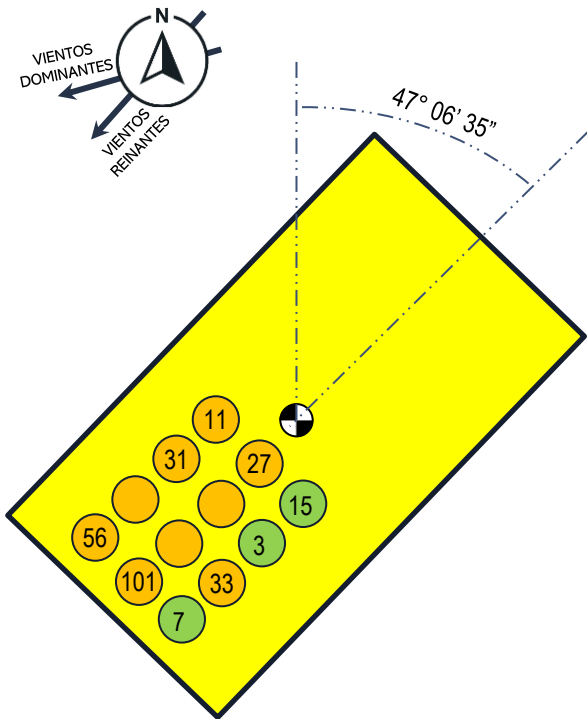

Ek-A	UTM COORDINATES		Type	Drilling Start Date	Drilling Finish Date	Total Depth (m)	Vertical Depth (m)
	X	Y					
Center of Structure	604,929.49	2,157,272.55	---	---	---	---	---
Well Ek-11	604,923.39	2,157,269.98	Deviated	14-May-1993	01-Aug-1993	4874	4671
Well Ek-27 DES (Development)	604,925.31	2,157,268.05	--	02-Jul-2022	13-Oct-2022	5035	4223
Well Ek-31	604,921.94	2,157,267.79	Deviated	03-Apr-1991	03-Dec-1991	5158	4755
Well Ek-33	604,922.86	2,157,261.75	Deviated	17-Mar-1994	15-Aug-1994	4884	4632
Well Ek-56	604,916.81	2,157,263.41	Directional	27-Jul-2012	08-Oct-2012	3133	2981
Well Ek-101	604,918.74	2,157,261.48	Vertical	01-Mar-1990	17-Jan-1991	4607	4607

02. - BALAM-TB Type of Structure: Tetrapod / Year of Installation: 2017 / Number of Wells: 4

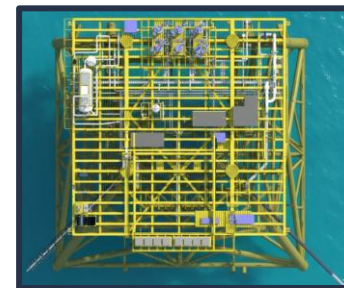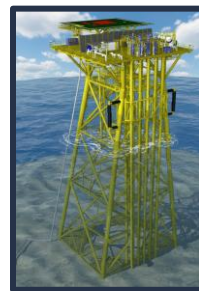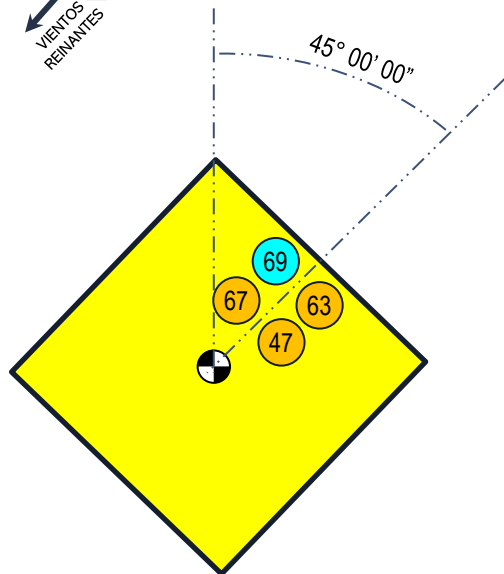

Balam-TB	UTM COORDINATES		Type	Drilling Start Date	Drilling Finish Date	Total Depth (m)	Vertical Depth (m)
	X	Y					
Center of Structure	609,952.53	2,154,716.54	---	---	---	---	---
Well Balam-47 DES (Development)	609,958.52	2,154,718.62	Horizontal	12-May-2018	10-Aug-2018	5149	4430
Well Balam-63 DES (Development)	609,960.77	2,154,720.86	Directional	27-Oct-2018	23-Jan-2019	4621	4508
Well Balam-69 INY (Water Injector)	609,958.43	2,154,722.85	Directional	26-Feb-2019	26-May-2019	5340	4835
Well Balam-67 DES (Development)	609,958.74	2,154,722.41	Directional	28-Jan-2020	26-Apr-2020	5296	4532



Occupied Active



Available



Occupied Inactive




Not Available



Water Injector

03.- Balam-A *Type of Structure: Octapod / Year of Installation: 2014 / Number of Wells: 6*

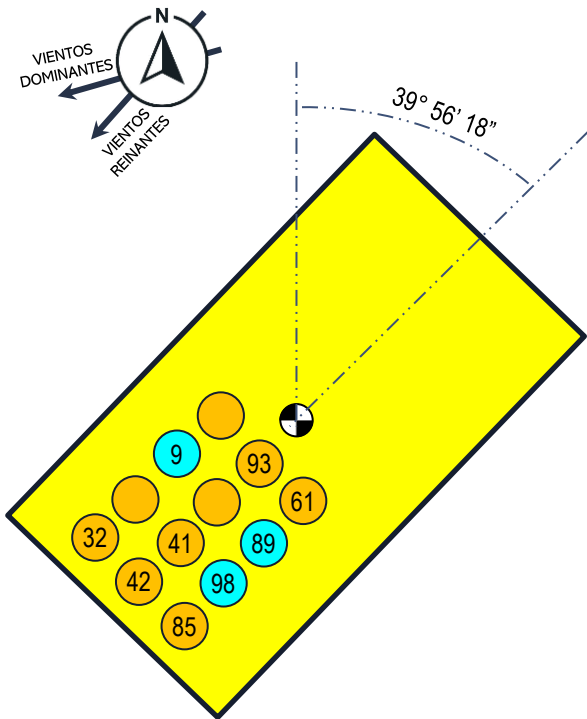

Balam-A	UTM COORDINATES		Type	Drilling Start Date	Drilling Finish Date	Total Depth (m)	Vertical Depth (m)
	X	Y					
Center of Structure	610,033.85	2,154,602.36	---	---	---	---	---
Well Balam-32 DES (Development)	610,021.61	2,154,592.48	---	14-Jul-2022	25-Nov-2022	5174	4512
Well Balam-42 DES (Development)	610,023.72	2,154,590.75	Directional J	26-Jun-2019	23-Nov-2019	5302	4983
Well Balam-85 DES (Development)	610,025.84	2,154,589.02	Directional	13-Mar-2020	16-Sep-2020	5034	4681
Well Balam-98 INY (Water Injector)	610,027.79	2,154,591.43	Directional	05-Jun-2021	10-Oct-2021	5130	4532
Well Balam-41 DES (Development)	610,025.68	2,154,593.15	Directional	01-Mar-2023	04-Jun-2023	4900	4594
Well Balam-89 INY (Water Injector)	610,029.75	2,154,593.83	---	16-Aug-2023	26-Nov-2023	5800	4806
Well Balam-9 INY (Water Injector)	610,026.27	2,154,597.35	Directional J	30-Nov-2018	07-May-2019	5156	4755
Well Balam-61 DES (Development)	610,031.71	2,154,596.23	---	22-Nov-2020	09-Apr-2021	5101	4483
Well Balam-93 DES (Development)	610,029.60	2,154,597.95	---	01-Dec-2021	09-Mar-2022	4826	4463



Occupied Active



Available



Occupied Inactive




Not Available




Water Injector

04.- Ek-A2 Type of Structure: Octapod / Year of Installation: 2018 / Number of Wells: 7

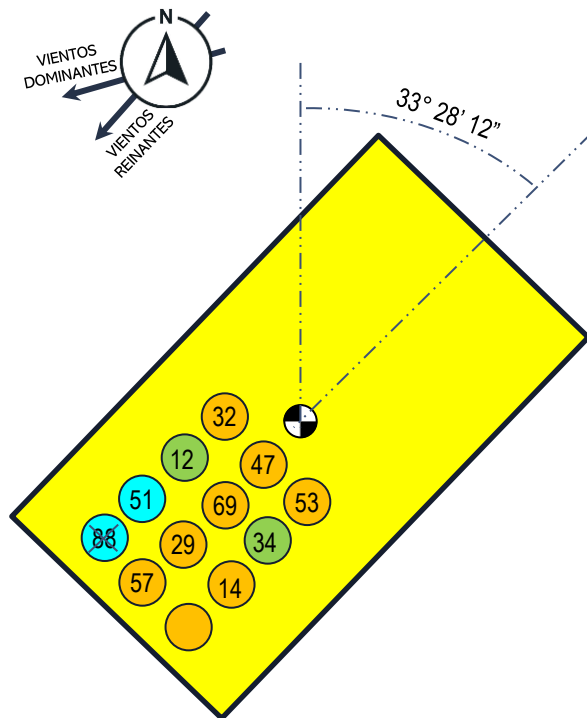

Ek-A2	UTM COORDINATES		Type	Drilling Start Date	Drilling Finish Date	Total Depth (m)	Vertical Depth (m)
	X	Y					
Center of Structure	604,791.19	2,157,360.12	---	---	---	---	---
Well Ek-57 DES (Development)	604,782.27	2,157,347.50	---	04-May-2023	10-Jul-2023	5403	4725
Well Ek-29 DES (Development)	604,783.98	2,157,350.07	---	07-Jul-2022	30-Sep-2022	5443	4608
Well Ek-14 DES (Development)	604,786.25	2,157,348.57	---	14-Mar-2021	20-May-2021	5110	4225
Well Ek-69 DES (Development)	604,785.70	2,157,352.65	---	12-Nov-2022	31-Mar-2023	5667	4654
Well Ek-32 DES (Development)	604,785.15	2,157,356.74	Directional J	09-Aug-2019	22-Dec-2019	4680	4565
Well Ek-47 DES	604,787.42	2,157,355.23	---	28-Jun-2020	18-Sep-2020	5066	4255
Well Ek-53 DES	604,789.69	2,157,353.73	Directional J	08-Dec-2021	07-Feb-2022	4467	4264

05.- Ek-TA Type of Structure: Tripod / Year of Installation: 1996 / Number of Wells: 5



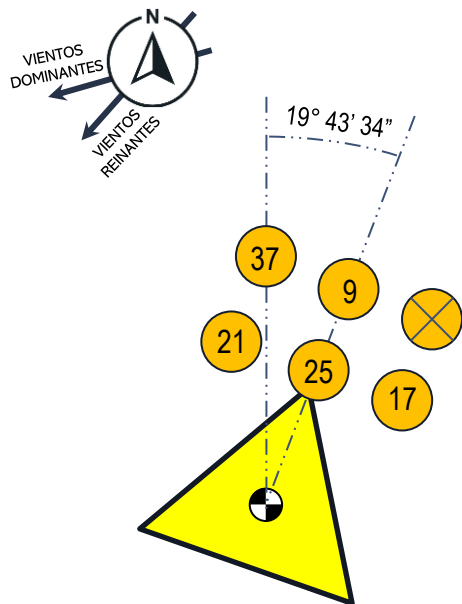


Ek-TA	UTM COORDINATES		Type	Drilling Start Date	Drilling Finish Date	Total Depth (m)	Vertical Depth (m)
	X	Y					
Center of Structure	606,152.50	2,156,600.00	---	---	---	---	---
Well Ek-37 DES (Development)	606,152.83	2,156,605.04	Directional J	29-Jul-2019	20-Oct-2019	4520	4261
Well Ek-9	606,154.49	2,156,605.43	--	02-Apr-2014	12-May-2015	--	--
Well Ek-21	606,151.86	2,156,604.27	Directional	28-May-1993	26-Jul-1993	4852	4699
Well Ek-25	606,154.35	2,156,603.51	Directional	30-Jan-1994	11-Apr-1994	4380	4298
Well Ek-17 DES (Development)	606,155.18	2,156,603.29	Horizontal	07-Dec-2018	30-Apr-2019	4912	4416

06. - BALAM-TE Type of Structure: Tetrapod / Year of Installation: 2020 / Number of Wells: 5



3° 02' 35"



Balam-TE	UTM COORDINATES		Type	Drilling Start Date	Drilling Finish Date	Total Depth (m)	Vertical Depth (m)
	X	Y					
Center of Structure	606,840.50	2,158,066.56	---	---	---	---	---
Well Balam 71 (Development)	606,837.62	2,158,075.94	Directional	26-Jul-1993	14-Feb-1994	3643	3379
Well Ek 55 (Development)	606,840.39	2,158,075.74	Deviated	31-Dec-2008	26-Mar-2009	3707	3081.3
Well Balam 91 (Development)	606,843.03	2,158,075.60	Deviated	05-Mar-1993	10-Jul-1993	4611	4572
Well Ek 35H	606,837.31	2,158,072.97	Horizontal	23-Aug-2009	07-Nov-2009	3497	3004
Well Balam 75	606,842.85	2,158,072.56	Directional	21-Aug-2013	02-Aug-2014	4845	4476



Occupied Active



Available



Occupied Inactive




Not Available





Water Injector

07.- BALAM-TA Type of Structure: Tripod / Year of Installation: 2021 / Number of Wells: 2

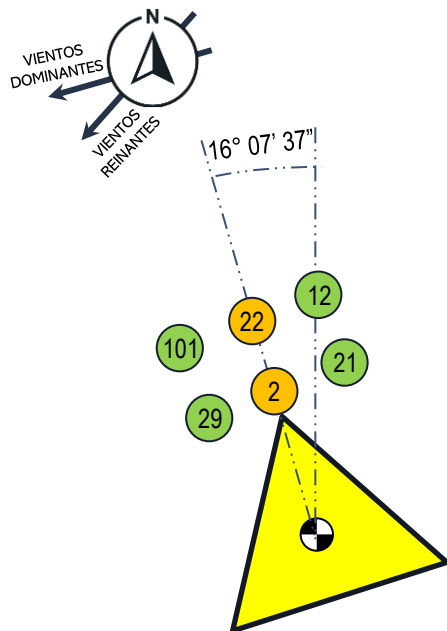


Balam-TA	UTM COORDINATES		Type	Drilling Start Date	Drilling Finish Date	Total Depth (m)	Vertical Depth (m)
	X	Y					
Center of Structure	608,504.52	2,155,269.54	---	---	---	---	---
Well Balam-22 DES (Development)	608,502.79	2,155,274.62	Directional	10-Jan-2020	18-Mar-2020	5140	---
Well Balam-2 DES (Development)	608,503.24	2,155,272.43	---	27-Apr-2021	30-Aug-2021	5119	4457

08.- BALAM-TA2 Type of Structure: LMS (Tetrapod) / Year of Installation: 2022 / Number of Wells: 2

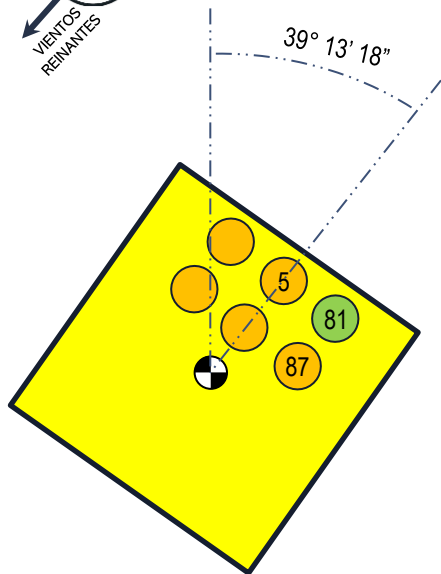

Balam-TA2	UTM COORDINATES		Type	Drilling Start Date	Drilling Finish Date	Total Depth (m)	Vertical Depth (m)
	X	Y					
Center of Structure	610,090.34	2,154,565.33	---	---	---	---	---
Well Balam-5 DES (Development)	610,095.67	2,154,572.80	---	01-Aug-2022	03-Oct-2022	5660	4577
Well Balam-87 DES (Development)	610,095.78	2,154,568.78	---	16-Feb-2023	30-Apr-2023	5180	4480

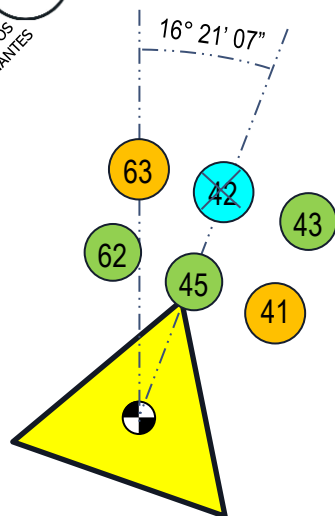

Ek-TB	UTM COORDINATES		Type	Drilling Start Date	Drilling Finish Date	Total Depth (m)	Vertical Depth (m)
	X	Y					
Center of Structure	607,325.51	2,155,847.54	---	---	---	---	---
Well Ek 63 DES (Development)	607,325.84	2,155,852.03	Deviated	11-Apr-1993	17-Jul-1993	4937	4790
Well Ek-41 (Development)	607,328.19	2,155,850.28	---	10-Nov-2013	18-Feb-2014	---	---



Occupied Active



Available



Occupied Inactive





Not Available




Water Injector

10. - BALAM-TD Type of Structure: Tetrapod / Year of Installation: 2005 / Number of Wells: 1

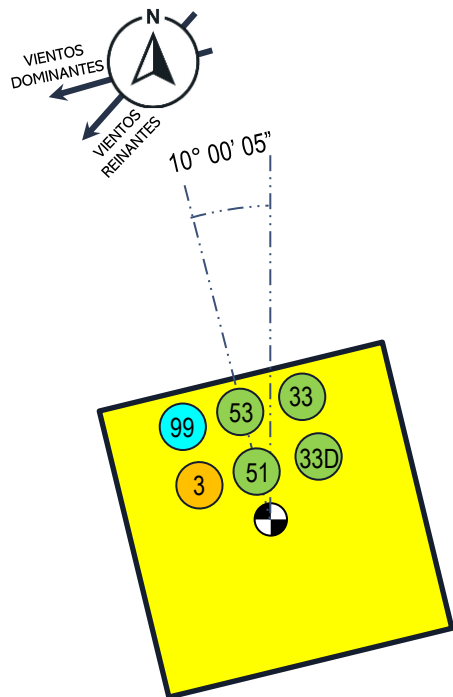

Balam-3



Balam-TD	UTM COORDINATES		Type	Drilling Start Date	Drilling Finish Date	Total Depth (m)	Vertical Depth (m)
	X	Y					
Center of Structure	608,116.51	2,157,259.55	---	---	---	---	---
Well Balam 99 INY (Water Injector)	608,111.08	2,157,268.48	Directional J	08-Aug-2017	31-Oct-2017	5204	4829
Well Balam 3 DES (Development)	608,111.64	2,157,265.30	Directional	25-Sep-2018	18-Dec-2018	5386	4418



Occupied Active



Available



Occupied Inactive



Not Available



Water Injector